




2022

8EL—ESPULSORE ELASTICO ESPULSORE PER SOTTOSQUADRA FLEXIBLE EJECTOR PIN

Materiale: 1.8159
Trattamento: tempra 45+/-3Hrc

Steel: 1.8159
Execution: Hardened, grinded, lapped 45 +/-3 Hrc

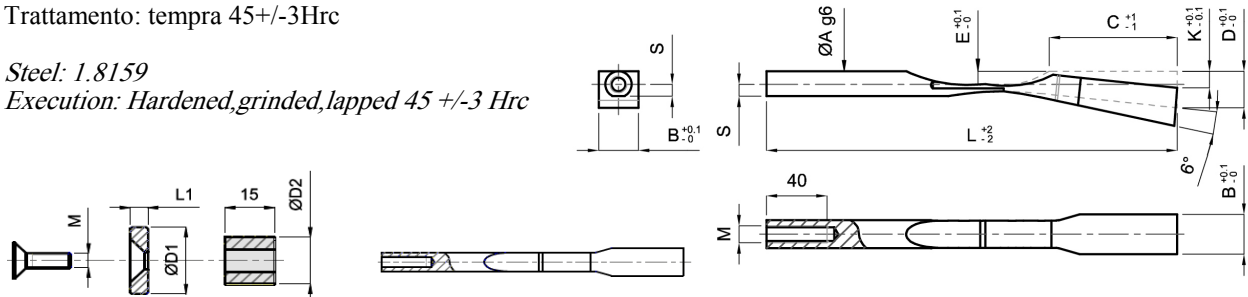

A	B	C	D	E	K	L	M	L1	D1	D2
6	6.2	22	9	3.5	3.5	125	4	5	12	12
6	8.2	22	9	3.5	3.5	125	4	5	12	12
8	8.2	25	11.5	4.5	4.5	140	5	6	14	12
8	10.2	25	11.5	4.5	4.5	140	5	6	14	12
8	12.2	25	11.5	4.5	4.5	140	5	6	14	12
10	14.2	30	13.6	5.5	5.5	175	6	8	18	16
10	16.2	30	13.6	5.5	5.5	175	6	8	18	16
10	18.2	30	13.6	5.5	5.5	175	6	8	18	16
6	6.2	30	10	3.5	3.5	175	4	5	12	12
6	8.2	30	10	3.5	3.5	175	4	5	12	12
8	10.2	45	11.2	5	4.5	175	5	6	14	12
8	12.2	45	11.2	5	4.5	175	5	6	14	12
10	14.2	50	17.5	6	5.5	190	6	8	18	16
10	16.2	50	17.5	6	5.5	190	6	8	18	16